

## A.ZEUS Slim Series LED Flood Light





**IP65 IK08** 

FL-06-G2 30W/50W/80W/100W/150W/200W

**5 Years Warranty** 































FL-06-G2

30W/50W/80W/100W/150W/200W

Tempered Glass








FL30W/50W-06-G2

FL80W/100W-06-G2

FL150W/200W-06-G2













### Options —

#### **Power**

UL/TUV/CE/SAA Driver MEAN WELL DRIVER

#### Color

3000K 4000K 5000K 5700K

### Led type

#### **B** LUMILEDS

SMD 3030 SMD 2835

#### **Beam Angle**

120° 120\*90° 120\*65°(Polarized 55°) 60°


### **Housing Color**

Black Grey White

FL-06-G2

30W/50W/80W/100W/150W/200W



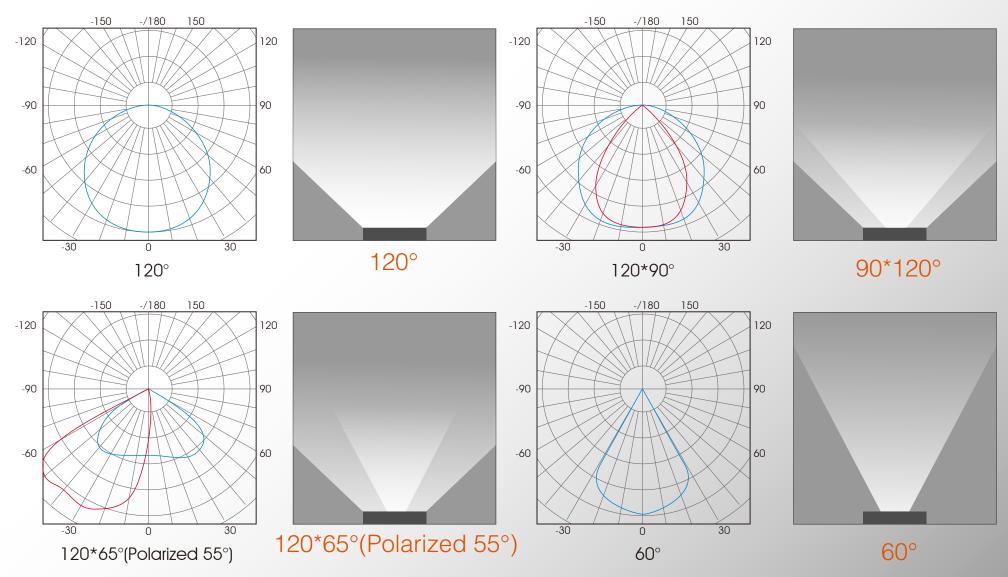


### FL-06-G2

Power: 30W/50W/80W/100W/150W/200W LED type: <a href="https://www.sml.edo.">www.sml.edo.</a> / SMD 3030 / SMD2835 Beam Angle: 120° / 120\*65° / 90\*120° / 60°

Black

Housing Color: Black / Grey / White







お客様の笑顔を糧に・・・。






30W/50W

お客様の笑顔を糧に・・・。

A.ZEUS

FL-06-G2 30W/50W/80W/100W/150W/200W

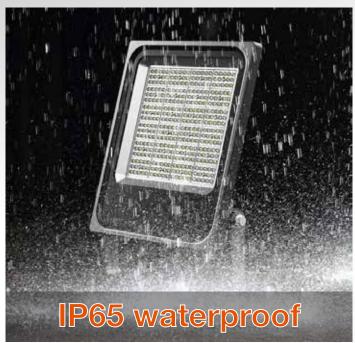





- · IP65 | CRI>80 | IK08
- · Significant energy saving: 130Lm/W system efficiency.
- · Nicely die-casting ADC12 aluminum alloy housing
- · 4mm tempered glass cover, strong protection and good optical function.
- · Life Span: >50,000 Hours.
- · Operating Temp range: -40°C to 50°C.
- · Small size, light weight, cheaper shipping cost.
- · Easy to install.







お客様の笑顔を糧に・・・。

FL-06-G2

30W/50W/80W/100W/150W/200W

Screws locked on the back

High transmittance PC lens

ADC12 Die Cast Housing **Heat Radiator** 

LED Brand: **WLUMILEDS** 

Hex Screw

Waterproof driver

**SPCC Bracket** 

Front Frame Cover

Tempered Glass


Waterproof rubber Ring


Reflector AL1070


PG7/PG9 waterproof connector

Breather



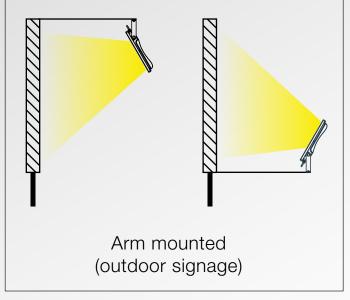



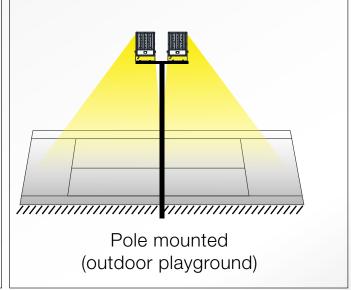















130Lm/w IP65









Factory, Station, Dock, Deck, Ship, Boat etc...

